


A/B/C

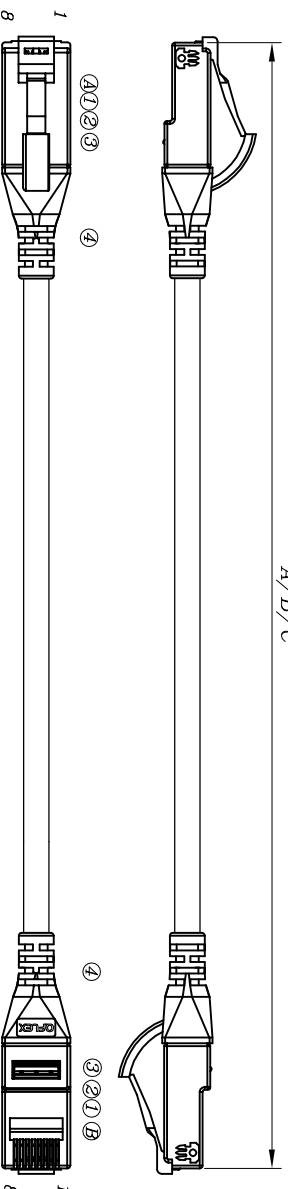


PLUG:

Drawing						
Mark						
GOLD PLATING Mark	3Mu"	3u"	6u"	15u"	30u"	50u"

TYPE Mark	Shielded	Unshielded
PC Mark	UL 94-V0	UL 94-V2

ARRANGE METHOD:



Remarks:

I. "A" indicate the length 1~9M, tolerance -080

II. "B" indicate the length 10~20M, tolerance -0150

III. "C" indicate the length above 20M, tolerance + (C*1%)/-0

ROHS



项次	品名	规格	颜色	用量	项次	品名	规格	颜色	用量
ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY	ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY
①	PLUG	C6F52C50V2II(2.15)	transparent	2	⑥				
②	Insert	10.7单排无脚 V2	transparent	2	⑦				
③	Insert	Ø4.0 V2	transparent	2	⑧				
④	PVC	60P 94-V2	1	6g	⑨				
⑤	Cable Tie	"C"MM	white	2	⑩				

线材规格		WIRE CONNECTION TABLE								
MATERIAL		white/orange	orange	white/green	blue	white/blue	green	white/brown	brown	
CAT.6 UTP PATCH CORD 28AWG	PVC	✓	A1	A2	A3	A4	A5	A6	A7	A8
	LSOH		B1	B2	B3	B4	B5	B6	B7	B8

裁线长度	合计	模号	图号
LENGTH	TOTAL	MOLD NO	DWG NO.
[A/B/C+80]*[19(0)]*[19(0)]		02-153	QFLEX6000-A1

单位名称	比例	张数
UNIT	SCALE	SHEET
mm	1/1	1/1
出图日期	角法	更改
DRAWN DATE	PROJ.	REV
2016/04/26		1
审核	校对	制图
APPROVAL	CHECKED	DRAWN
		Cathyli