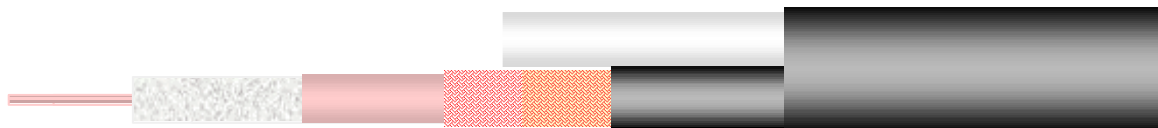


Description

Coaxial Cable for underground installation with side pipe - 75 Ohm

Outdoor and Underground installation cable (Screening Attenuation - Class A)

**Data Sheet****11/48LOPIPE**

Ø

15,30 x 8,10
(PE)**Class CPR acc. to UE 305/2011 (DoP)**

Fca

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

Standards

EN50117-10-2

CEI-UNEL 36762

Reaction to Fire

EN50575

Application

Multimedia / Hybrid Cable

Exterior and Underground Installation

Outer sheath of Polyethylene - black (RAL 9011) - with carbonblack (PE) 15,30 x 8,10 ± 0,10 mm

Printed each meter by yellow ink-jet :

CAVEL 1.1/4.8 LO + PIPE MADE IN ITALY 75 Ohm Euroclass Fca EN50117-10-2 CEI-UNEL 36762 C-4 (U0 = 400V) gggaan m

(gggaan=batch number m=meter marking)

Physical data

Weight of copper conductors	20,50	kg/km
Total weight of cable	73,10	kg/km
Minimum bending radius (single/repeated bending)	40 / 80	mm
Maximum cable pulling strength	150	N
Minimum installation temperature	-5	°C
Operating temperature	-40 / +80	°C

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

09/10/2023

Responsible

A. Bergaglio

Description

Double Shielded Coaxial Drop Cable, for Wide Band - 75 Ohm
 Coaxial Drop Cable for Wide Band - 75 Ohm
 Outdoor and Underground installation cable (Screening Attenuation - Class A)

**Data Sheet****11/48LO**

11/48LOPIPE



Ø	1,13	4,80	4,90	5,30	7,30
	(Cu)	(PEG)	(Cu/Pet)	(Cu)	(PE)

Class CPR acc. to UE 305/2011 (DoP)

Fca

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

Standards

EN50117-10-2

CEI-UNEL 36762

Reaction to Fire

EN50575

Application

Exterior and Underground Installation

Construction data

Inner conductor of plain copper	(Cu)	Ø 1,13 ± 0,02	mm
Dielectric of physical foam polyethylene	(PEG)	Ø 4,80 ± 0,10	mm
Copper/Polyester tape longitudinally overlapped	(Cu/Pet)		
Water repellent sealing (dielectric)	(Jelly1)		
Braid of annealed copper wires	(Cu)		
Braid optical coverage (IEC 96-1)		59	%
Tracer Identifier	Year + Flag		
Diameter over Braid		Ø 5,30	mm
Outer sheath of Polyethylene - black (RAL 9011) - with carbonblack	(PE)	Ø 7,30 ± 0,10	mm
Printed each meter by yellow ink-jet :			

CAVEL 1.1/4.8 LO MADE IN ITALY 75 Ohm Euroclass Fca EN50117-10-2 CEI-UNEL 36762 C-4 (U0 = 400V)
gggaaa(n) m

(gggaan=batch number m=meter marking)

Physical data

Weight of copper conductors	20,50	kg/km
Total weight of cable	46,10	kg/km
Minimum bending radius (single/repeated bending)	40 / 80	mm
Maximum cable pulling strength	150	N
Minimum installation temperature	-5	°C
Operating temperature	-40 / +80	°C

Electrical data**ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli
 Tel +39-382.815150 Fax +39-0382.814212

Date

09/10/2023

Responsible

A. Bergaglio

Description

Double Shielded Coaxial Drop Cable, for Wide Band - 75 Ohm
 Coaxial Drop Cable for Wide Band - 75 Ohm
 Outdoor and Underground installation cable (Screening Attenuation - Class A)

**Data Sheet****11/48LO**

11/48LOPIPE

Characteristic impedance	200 MHz	75 ± 3	Ohm
Capacitance (@1kHz)		52 ± 2	pF/m
Velocity Ratio		85 %	
Inner conductor resistance		18	Ohm/km
Outer conductor resistance		14,80	Ohm/km
Loop resistance		32,80	Ohm/km
Sheat Insulation voltage (spark test)		8	kV
Maximum current (I _{eff})		8	A

Structural return loss (SRL)

5 - 470 MHz	>30 dB
470 - 1000 MHz	>28dB
1000 - 2000 MHz	>26 dB
2000 - 3000 MHz	>22 dB

Screening Attenuation (SA)	SA-Class A	Transfer Impedance (Z _t)	
30 - 1000 MHz	> 85 dB	5 - 30 MHz	< 11,0 mΩ/m
1000 - 2000 MHz	> 80 dB		
2000 - 3000 MHz	> 75 dB		

Attenuation (at 20°C)

Frequency [MHz]	Attenuation [dB/100m]	Frequency [MHz]	Attenuation [dB/100m]
5	1,50	690	14,50
10	2,10	1000	17,90
30	2,90	1750	24,80
50	3,80	2150	27,30
200	7,90	2400	29,10
300	9,70	3000	33,00
470	12,00		

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
 Tel +39-382.815150 Fax +39-0382.814212


Date**09/10/2023****Responsible****A. Bergaglio**

Description

Double Shielded Coaxial Drop Cable, for Wide Band - 75 Ohm
Coaxial Drop Cable for Wide Band - 75 Ohm
Outdoor and Underground installation cable (Screening Attenuation - Class A)

**Data Sheet****11/48LO**

11/48LOPIPE

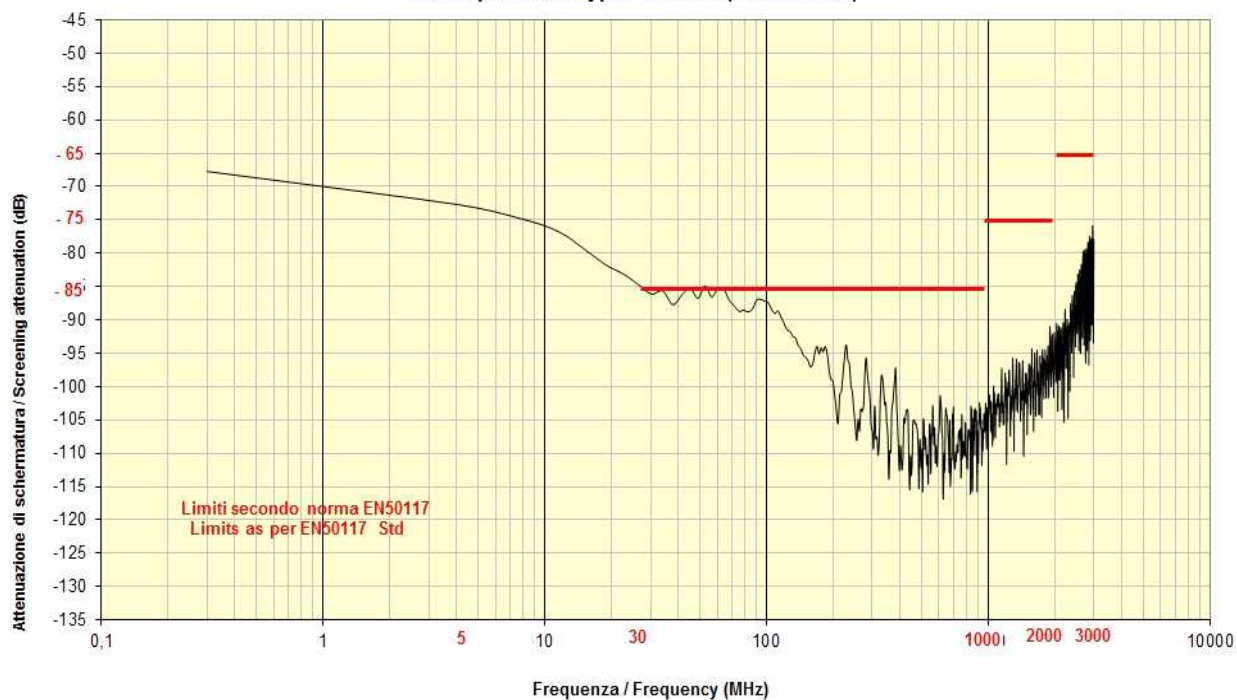Attenuazione di schermatura / Screening Attenuation**Cavo classe A / A Class Cable****Cavo tipo / Cable type: 11/48LO (new version)****ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212


Date**09/10/2023****Responsible****A. Bergaglio**

Description
PE/PP Side Pipe



Data Sheet

PIPE
11/48LOPIPE



Ø

4,0 / 7,0 mm
HDPE

Application

Side Pipe in High Density Polyethylene

(HDPE)

Inner Ø 4,00 ± 0,20 mm

Outer Ø 7,00 ± 0,20 mm

Physical data

Weight 25,00 kg/km

Maximum Blowing Pressure 20 bar

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

01/07/2025

Responsible

P. Piccinini