


## Product description

TD 102 E is a universal FUGA design. It is a terminating outlet, with F-connector.

- IN connection via Cable-clamp
- OUT via F-female connector
- Zinc die cast housing
- Shielding comply to Class A+ (Class A + 10dB) according to EN 60728-2 (5.5)

## General Mechanical Dimensions (illustration TD XXX)

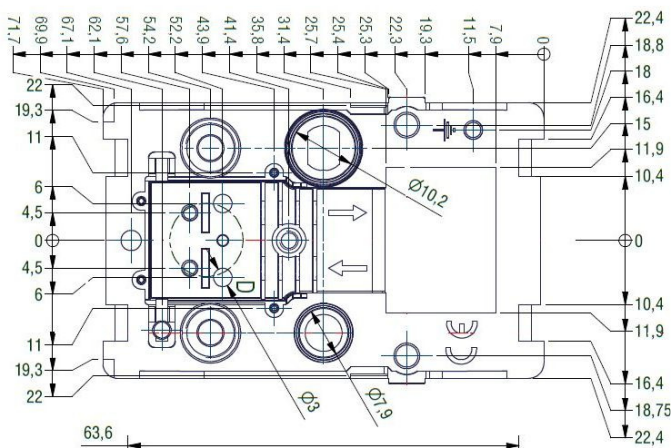

## Photo




Created / Creator	Revision / Date	Editor	Tested	
24.04.2025 / JRO	0.4 / 26.05.2025			
Description			Item number	Page
TD 102 E, 1-way terminating Wall Outlet			302589	1 / 2

## Performance specifications

Item		Frequency (MHz)	Typical	QC Limit
Insertion Loss (dB)	IN-OUT	5-1300	0,6	≤0.9
		1300-2400	1	≤1.3
Return loss (dB)	IN/OUT	5-2400	>18dB @47MHz -1.5dB/octave >10dB)	
Power Pass	IN-OUT	Yes(MAX.2000mA)		

## Block schematic

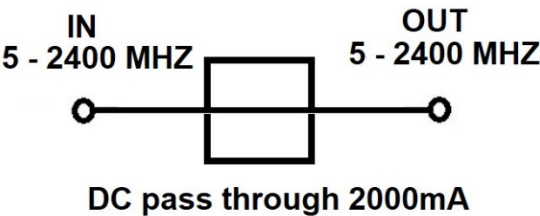

Created / Creator	Revision / Date	Editor	Tested	
24.04.2025 / JRO	0.4 / 26.05.2025			
Description			Item number	Page
TD 102 E, 1-way terminating Wall Outlet			302589	2 / 2